OFFICELED



LED CEILING DOWNLIGHT



OVERVIEW





- SMD LED Board
- Driver included
- PMMA
- Spring-loaded mounting clips with non-slip ends
- 150-265v




- Commercial Lighting
- Office Lighting
- Shopping Center Lighting
- Retail Store Lighting
- School and Universities
- Hospitality Industry
- Hospitals and Clinics







DIMENSION DATA

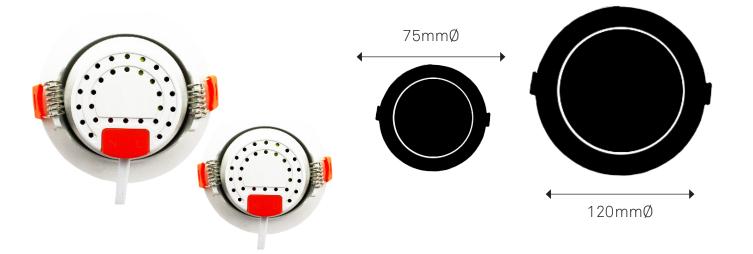

ORDERING DATA

DESCRIPTION	SDL-7W-3K	SDL-7W-4K	SDL-12W-3K	SDL-12W-4K
WATTAGE (LAMP TYPE)	7W	7W	12W	12W
DRIVER (INCLUDED)	7W Driver	7W Driver	12W Driver	12W Driver
COLOUR TEMPERATURE	3000K	4000K	3000K	4000K
LUMEN OUTPUT	600Lm	600Lm	1100Lm	1100Lm
CLASS	II			
IP RATING	IP20			
CRI	80			
LIFESPAN	25,000Hrs			
CUT-OUT SIZE	75mmØ	75mmØ	120mmØ	120mmØ



Due to continuing R&D, the above data may change without prior notice. Please consult us for the latest available options. Warranties subject to our standard terms and conditions of sale.





